



# TRANSITION

BICYCLE COMPANY

TRANSITION BIKES

# REPEATER ⚡

## 29" WHEELS

160MM REAR / 160MM FRONT

TELAIO FULL CARBON

SHIMANO EP8 DRIVE UNIT • SHIMANO BT-E8036 (630WH)

COLORI DISPONIBILI:

MOSSY GREEN




SHIMANO | EP8 EQUIPPED

### SPINTO DA TE, ASSISTITO DA SHIMANO

La REPEATER è dotata di un sistema Shimano EP8 che fornisce 85 Nm di coppia, 250 W di potenza continua e 500 W di potenza di picco. Tutti i livelli di assistenza sono dotati del display a colori Shimano top di gamma, che ti consente di capire facilmente in quale modalità ti trovi con una rapida occhiata.

La batteria Shimano da 630 Wh è facilmente rimovibile con una chiave a brugola da 4 mm in modo da poterla sostituire facilmente con una batteria di riserva per una maggiore autonomia o fare più giri mentre l'altra batteria è in carica. Il sistema Shimano completo significa che non ci sono cavi personalizzati, spine o caricabatterie proprietari, quindi puoi trovare parti di ricambio ovunque e persino prendere in prestito un caricabatterie da un amico.

Il motore EP8 viene pre-sintonizzato da Transition con due profili per massimizzare la durata della batteria e offrirti la migliore esperienza di guida possibile. Il profilo 1 si concentra sui darti una sensazione di guida potente ma naturale in modalità TRAIL, lasciando BOOST per quando ne hai davvero bisogno e rendendo ECO più utilizzabile sul sentiero. Il profilo 2 si concentra sulla distanza, aiutandoti ad andare il più lontano possibile quando l'autonomia è ciò che desideri. Tuttavia è sempre possibile modificare facilmente le caratteristiche delle modalità ECO, TRAIL e BOOST in entrambi i profili tramite l'app Shimano E-Tube. Il sistema Shimano EP8 è stato progettato specificamente per l'uso fuoristrada, offrendo un'integrazione perfetta, molta potenza e opzioni per personalizzare la sensazione del motore in base alle tue preferenze.

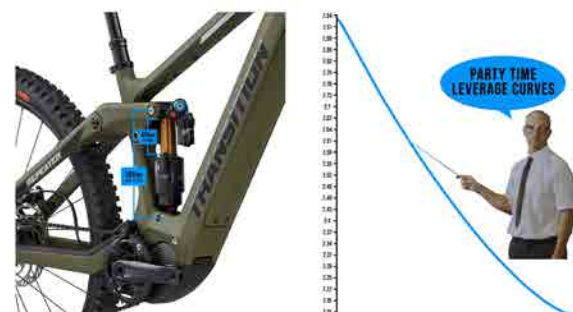

### FRAME & TECH INFO

REAR TRAVEL:	160mm
FRONT TRAVEL:	160mm
WHEEL SIZE:	29"
SIZES:	SM, MD, LG, XL
COLORS:	Mossy Green
FRAME BEARINGS:	2x 6903, 2x 6902, 4x 6802, 2x 3802, 2x 6900
FORK AXLE TO CROWN:	576mm
FORK OFFSET:	44mm
REAR SHOCK SIZE:	205mm x 65mm
SHOCK HARDWARE:	Trunion Mount Top / 25mm x 8mm Bottom
HEADSET (TOP):	Z56 (For Internal Cable Routing)
HEADSET (BOTTOM):	Z66mm (Fits 1.5 or 1.8 Steerer)
BB SHELL (DRIVE UNIT):	Shimano EP8
CHAINLINE:	53mm
REAR BRAKE MOUNT:	180mm Post Mount, Max Rotor Size 223mm
DERAILLEUR HANGER:	SRAM UDH
REAR AXLE:	Transition Axle For UDH, 12 x 148mm
ISCG TABS:	Shimano STEPS Chain Guide Mount
SEATPOST DIAMETER:	31.6mm
SEAT CLAMP:	37mm
MAX SEATPOST INSERTION:	Small 225mm   Medium 250mm   Large 290mm   XL 320mm
MAX CHAINRING SIZE:	38T
MAX TIRE SIZE:	29 x 2.6
REAR SHOCK SAG:	18-22mm (28-34%)
SUSPENSION PROGRESSION:	25.9 %



### REPEATER AXS



### REPEATER GX

### REPEATER NX

	REPEATER GX	REPEATER NX	REPEATER AXS
TELAIO	Repeater Carbon 160mm	Repeater Carbon 160mm	Repeater Carbon 160mm
MOTORE	Shimano EP8 Drive Unit	Shimano EP8 Drive Unit	Shimano EP8 Drive Unit
BATTERIA	Shimano BT-E8036 (630Wh)	Shimano BT-E8036 (630Wh)	Shimano BT-E8036 (630Wh)
DISPLAY	Shimano SC-EM800	Shimano SC-EM800	Shimano SC-EM800
REMOTE	Shimano SW-EM800	Shimano SW-EM800	Shimano SW-EM800
AMMORTIZZATORE	Fox Float X2 Factory 2 Position (160mm Travel/205x65mm)	Fox Float X Performance Elite (160mm Travel/205x65mm)	Fox Float X Performance (160mm Travel/205x65mm)
FORCELLA	Fox Float 38 Grip 2 Factory 29 (160mm Travel/44mm Offset/1.5 Taper)	RockShox ZEB Ultimate 29 (160mm Travel/44mm Offset/1.8 Taper)	RockShox ZEB R 29 (160mm Travel/44mm Offset/1.8 Taper)
SERIE STERZO	Acros ICR	Acros ICR	Acros ICR
ATTACCO	ANVL Swage (40mm)	ANVL Swage (40mm)	RaceFace Aeffect R (40mm)
MANUBRIO	OneUp Carbon Bar	ANVL Mandrel Alloy	RaceFace Chester
MANUBRIO	ODI Elite Flow Lock-On	ODI Elite Flow Lock-On	ODI Elite Flow Lock-On
MANOPOLE	ANVL Forge Cromo	ANVL Forge Cromo	ANVL Forge Cromo
SELLA	OneUp Dropper Post	OneUp Dropper Post	OneUp Dropper Post
REGGISELLA	(150mm SM, 180mm MD, 210mm LG/XL)	(150mm SM, 180mm MD, 210mm LG/XL)	(150mm SM, 180mm MD, 210mm LG/XL)
FRENI	Magura MT7 w/ HC1 Levers	Magura MT7 w/ HC1 Levers	Magura MT5 w/ HC1 Levers
DISCHI FRENI	Magura MDR-C (203mm)	Magura MDR-C (203mm)	Magura MDR-C (203mm)
COMANDO CAMBIO	SRAM GX AXS	SRAM GX Eagle Single Click	SRAM NX Eagle Single Click
CAMBIO	SRAM GX AXS	SRAM GX Eagle	SRAM NX Eagle
PACCO PIGNONI	SRAM XG 1295 (10-52t)	SRAM XG 1275 (10-52t)	SRAM PG 1230 (10-50t)
CATENA	SRAM XX1 Black or Copper Shimano EM900	SRAM GX Eagle Shimano EM900	SRAM NX Eagle Shimano EM600
GUARNITURA	(34t/160mm)	(34t/160mm)	(34t/160mm)
GUIDACATENA	OneUp STEPS Guide	OneUp STEPS Guide	OneUp STEPS Guide
RUOTE	DT Swiss Hybrid HX 1700 Spline	DT Swiss Hybrid H 1900 Spline	Stans Flow D
PNEUMATICO ANT	Schwalbe Magic Mary, Super Gravity, Ultra Soft (29x2.4)	Schwalbe Magic Mary, Super Gravity, Ultra Soft (29x2.4)	Schwalbe Magic Mary, Super Gravity, Ultra Soft (29x2.4)
PNEUMATICO POST	Schwalbe Big Betty, Super Gravity, Soft (29x2.4)	Schwalbe Big Betty, Super Gravity, Soft (29x2.4)	Schwalbe Big Betty, Super Gravity, Soft (29x2.4)
INCLUSO	Shimano EC-E6002 Charger, Tubeless Valves & Stans Sealant (6oz)	Shimano EC-E6002 Charger, Tubeless Valves & Stans Sealant (6oz)	Shimano EC-E6002 Charger, Tubeless Valves & Stans Sealant (6oz)
PESO	-	-	-

\* LE SPECIFICHE DI MONTAGGIO POSSONO VARIARE SENZA PREAVVISO. PER CONSULTARE I KIT DI MONTAGGIO AGGIORNATI VISITA IL SITO WWW.TRANSITIONBIKES.COM

# SPIRE CARBON

29" WHEELS


170MM REAR / 170MM FRONT

COLORI DISPONIBILI:

PRIMER GREY

HUCKLEBERRY

TAGLIE: S / M / L / XL / XXL

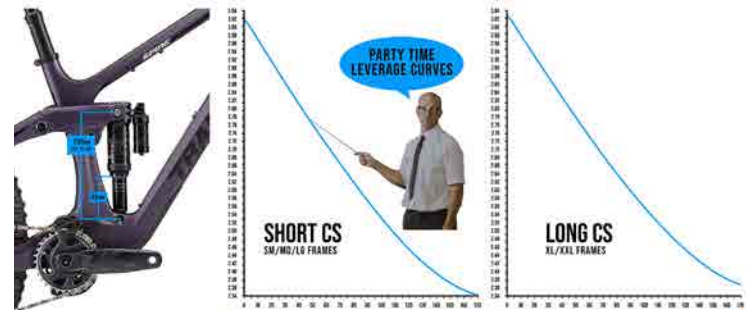

## FRAME & TECH INFO

REAR TRAVEL:	170mm (Compatible with 160mm)
FRONT TRAVEL:	170mm (Compatible with 180mm)
WHEEL SIZE:	29"
SIZES:	S, M, L, XL, XXL
COLORS:	Carbon: Huckleberry, Primer Gray
FRAME BEARINGS:	2x 6903, 2x 6902, 4x 6802, 2x 3802, 2x 6900
FORK AXLE TO CROWN:	584mm (Includes headset)
FORK OFFSET:	44mm
REAR SHOCK SIZE:	205mm x 65mm (Compatible with 205mm x 60mm)
SHOCK HARDWARE:	Trunnion Mount Top / 30mm x 8mm Bottom
HEADSET (TOP):	56mm Zero Stack
HEADSET (BOTTOM):	56mm Zero Stack
BB SHELL:	73mm BSA Threaded
CHAINLINE:	52mm
REAR BRAKE MOUNT:	180mm Post Mount, Max Rotor Size 223mm
REAR AXLE:	Syntace X12 148, 1.0mm Thread Pitch
ISCG TABS:	ISCG05
SEATPOST DIAMETER:	31.6mm
SEAT CLAMP:	37.0mm
MAX SEATPOST INSERTION:	Small 200mm   Medium 230mm   Large 260mm   XL 280mm   XXL 300mm
MAX CHAINRING SIZE:	34T Standard Single Ring (Based on 52mm Boost Chainline)
MAX TIRE SIZE:	29 x 2.6
REAR SHOCK SAG:	170mm/65mm: 18-22mm (28-34%) 160mm/60mm: 16-20mm (27-33%)

TELAIO VENDUTO CON AMMORTIZZATORE: FOX FLOAT X2 FACTORY 2 POSITION



SPIRE CARBON GX



PRIMER GREY



HUCKLEBERRY

	SPIRE CARBON XT	SPIRE CARBON GX
TELAIO	Spire Carbon 170mm	Spire Carbon 170mm
AMMORTIZZATORE	Fox Float X2 Factory 2 Position	RockShox Super Deluxe Ultimate Air
FORCELLA	Fox Float 38 Grip 2 Factory 29 (170mm /44mm Offset)	RockShox ZEB Ultimate 29 170mm /44mm Offset
SERIE STERZO	FSA NO55R/57	FSA NO.55R/57
ATTACCO MANUBRIO	ANVL Swage (40mm)	ANVL Swage (40mm)
MANUBRIO	ANVL Mandrel Alloy	ANVL Mandrel Alloy
MANOPOLE	Sensus Lite	Sensus Lite
SELLA	ANVL Forge Cromo or WTB Silverado	ANVL Forge Cromo or WTB Silverado
REGGISSELLA	OneUp Dropper Post	OneUp Dropper Post
FRENI	Shimano XT M8120	SRAM Code RSC
DISCHI FRENI	Shimano RT86 (203mm)	SRAM Centerline (200mm)
COMANDO CAMBIO	Shimano XT M8100	SRAM GX Eagle
CAMBIO	Shimano XT M8100	SRAM GX Eagle
PACCO PIGNONI	Shimano XT M8100 (10-51t)	SRAM XG 1275 (10-52t)
CATENA	Shimano XT M8100	SRAM GX Eagle
GUARNITURA	Shimano XT M8100 (30t/165mm)	SRAM GX Alloy DUB (30t/165mm)
GUIDACATENA	OneUp Bash Guide	OneUp Bash Guide
RUOTE	DT Swiss EX 1700 Spline 30	Stans Flow S1
PNEUMATICO ANT	Schwalbe Magic Mary, Super Trail, Soft (29x2.4)	Schwalbe Magic Mary, Super Trail, Soft (29x2.4)
PNEUMATICO POST	Schwalbe Big Betty, Super Trail, Soft (29x2.4)	Schwalbe Big Betty, Super Trail, Soft (29x2.4)
INCLUSO	Tubeless Valves & Stans Sealant (6oz)	Tubeless Valves & Stans Sealant (6oz)
PESO	14.86 kg (Size MD)	-

\* LE SPECIFICHE DI MONTAGGIO POSSONO VARIARE SENZA PREAVVISO. PER CONSULTARE I KIT DI MONTAGGIO AGGIORNATI VISITA IL SITO WWW.TRANSITIONBIKES.COM

# SPIRE ALLOY

29" WHEELS


170MM REAR / 170MM FRONT

COLORI DISPONIBILI:

FACTORY ORANGE

RAW

TAGLIE: S / M / L / XL / XXL

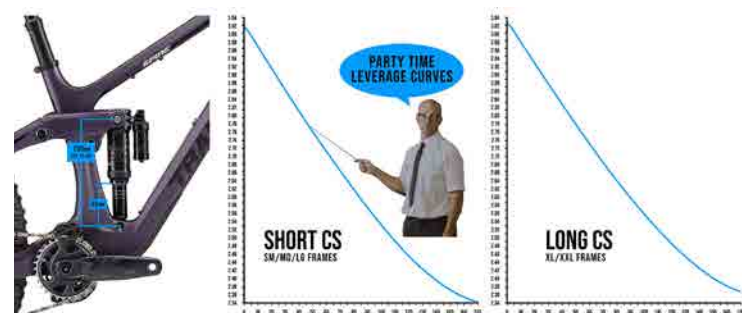

## FRAME & TECH INFO

REAR TRAVEL:	170mm (Compatible with 160mm)
FRONT TRAVEL:	170mm (Compatible with 180mm)
WHEEL SIZE:	29"
SIZES:	S, M, L, XL, XXL
COLORS:	Factory Orange, Raw
FRAME BEARINGS:	2x 6903, 2x 6902, 4x 6802, 2x 3802, 2x 6900
FORK AXLE TO CROWN:	584mm (Includes headset)
FORK OFFSET:	44mm
REAR SHOCK SIZE:	205mm x 65mm (Compatible with 205mm x 60mm)
SHOCK HARDWARE:	Trunnion Mount Top / 30mm x 8mm Bottom
HEADSET (TOP):	56mm Zero Stack
HEADSET (BOTTOM):	56mm Zero Stack
BB SHELL:	73mm BSA Threaded
CHAINLINE:	52mm
REAR BRAKE MOUNT:	180mm Post Mount, Max Rotor Size 223mm
REAR AXLE:	Syntaxe X12 148, 1.0mm Thread Pitch
ISCG TABS:	ISCG05
SEATPOST DIAMETER:	31.6mm
SEAT CLAMP:	34.9mm
MAX SEATPOST INSERTION:	Small 200mm   Medium 230mm   Large 270mm   XL 300mm   XXL 330mm
MAX CHAINRING SIZE:	34T Standard Single Ring (Based on 52mm Boost Chainline)
MAX TIRE SIZE:	29 x 2.6
REAR SHOCK SAG:	170mm/65mm: 18-22mm (28-34%) 160mm/60mm: 16-20mm (27-33%)

TELAIO VENDUTO CON AMMORTIZZATORE: FOX FLOAT X2 FACTORY 2 POSITION



SPIRE ALLOY XT



RAW



ORANGE

	SPIRE ALLOY XT	SPIRE ALLOY GX	SPIRE ALLOY DEORE	SPIRE ALLOY NX
TELAIO	Spire Alloy 170mm	Spire Alloy 170mm	Spire Alloy 170mm	Spire Alloy 170mm
AMMORTIZZATORE	Fox Float X2 Factory 2 Position	RockShox Super Deluxe Ultimate Air	Fox Float DPX2 Performance	Fox Float DPX2 Performance
FORCELLA	Fox Float 38 Grip 2 Factory 29 170mm/44mm Offset	RockShox ZEB Ultimate 29 170mm/44mm Offset	Marzocchi Bomber Z1 Air 29 170mm/44mm Offset	Marzocchi Bomber Z1 Air 29 170mm/44mm Offset
SERIE STERZO	FSA NO55R/57	FSA NO.55R/57	FSA NO55R/57	FSA NO55R/57
ATTACCO MANUBRIO	ANVL Swage (40mm)	ANVL Swage (40mm)	RaceFace Aeffect R (40mm)	RaceFace Aeffect R (40mm)
MANUBRIO	ANVL Mandrel Alloy	ANVL Mandrel Alloy	RaceFace Chester	RaceFace Chester
MANOPOLE	Sensus Lite	Sensus Lite	ODI Elite Flow Lock-On	ODI Elite Flow Lock-On
SELLA	ANVL Forge Cromo or WTB Silverado	ANVL Forge Cromo or WTB Silverado	ANVL Forge Cromo or WTB Silverado Cromo	ANVL Forge Cromo
REGGISELLA	OneUp Dropper Post	OneUp Dropper Post	OneUp Dropper Post	OneUp Dropper Post
FRENI	Shimano XT M8120	SRAM Code RSC	Shimano Deore M6120	SRAM Guide RE
DISCHI FRENI	Shimano RT86 (203mm)	SRAM Centerline (200mm)	Shimano RT70 (203mm)	SRAM Centerline (220/200mm)
COMANDO CAMBIO	Shimano XT M8100	SRAM GX Eagle	Shimano Deore M6100	SRAM NX Eagle MMX
CAMBIO	Shimano XT M8100	SRAM GX Eagle	Shimano Deore M6100	SRAM NX Eagle
PACCO PIGNONI	Shimano XT M8100 (10-51t)	SRAM XG 1275 (10-52t)	Shimano Deore M6100 (10-51t)	SRAM PG 1230 (11-50t)
CATENA	Shimano XT M8100	SRAM GX Eagle	Shimano Deore M6100	SRAM NX Eagle
GUARNITURA	Shimano XT M8100 (30t/165mm)	SRAM GX Alloy DUB (30t/165mm)	RaceFace Aeffect R (30t/165mm)	"SRAM Descendent 6k DUB (30t/165mm)"
GUIDACATENA	OneUp Bash Guide	OneUp Bash Guide	OneUp Bash Guide	OneUp Bash Guide
RUOTE	DT Swiss EX 1700 Spline 30	Stans Flow S1	Stans Flow D	Stans Flow D
PNEUMATICO ANT	Schwalbe Magic Mary, Super Trail, Soft (29x2.4)	Schwalbe Magic Mary, Super Trail, Soft (29x2.4)	Schwalbe Magic Mary, Super Trail, Soft (29x2.4)	Schwalbe Magic Mary, Super Trail, Soft (29x2.4)
PNEUMATICO POST	Schwalbe Big Betty, Super Trail, Soft (29x2.4)	Schwalbe Big Betty, Super Trail, Soft (29x2.4)	Schwalbe Big Betty, Super Trail, Soft (29x2.4)	Schwalbe Big Betty, Super Trail, Soft (29x2.4)
ALTRO	Tubeless Valves & Stans Sealant (6oz)	Tubeless Valves & Stans Sealant (6oz)	Tubeless Valves & Stans Sealant (6oz)	Tubeless Valves & Stans Sealant (6oz)
PESO	-	-	-	-

\* LE SPECIFICHE DI MONTAGGIO POSSONO VARIARE SENZA PREAVVISO. PER CONSULTARE I KIT DI MONTAGGIO AGGIORNATI VISITA IL SITO WWW.TRANSITIONBIKES.COM


# PATROL ALLOY

27.5"/29" WHEELS  
160MM REAR / 160MM FRONT

COLORI DISPONIBILI:

BLUEBERRY  
RAW

TAGLIE: S / M / L / XL

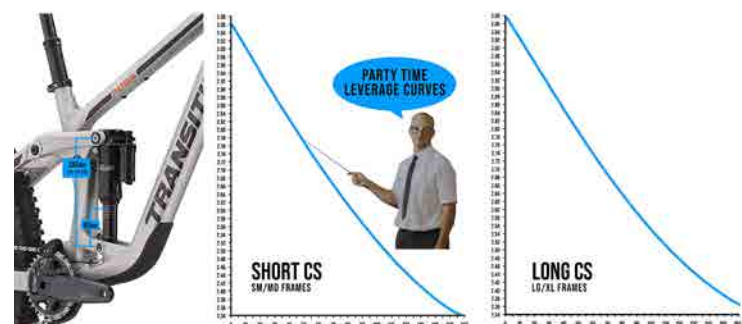

## FRAME & TECH INFO

REAR TRAVEL:	160mm (Compatible with 170mm)
FRONT TRAVEL:	160mm (Compatible with 170mm)
WHEEL SIZE:	27.5" / 29"
SIZES:	S, M, L, XL
COLORS:	Blueberry, Raw
FRAME BEARINGS:	2x 6903, 2x 6902, 4x 6802, 2x 3802, 2x 6900
FORK AXLE TO CROWN:	574mm at 160mm (Includes headset)
FORK OFFSET:	44mm
REAR SHOCK SIZE:	205mm x 60mm (Compatible with 205mm x 65mm)
SHOCK HARDWARE:	Trunnion Mount Top / 30mm x 8mm Bottom
HEADSET (TOP):	56mm Zero Stack
HEADSET (BOTTOM):	56mm Zero Stack
BB SHELL:	73mm BSA Threaded
CHAINLINE:	52mm
REAR BRAKE MOUNT:	180mm Post Mount, Max Rotor Size 223mm
REAR AXLE:	Syntace X12 148, 1.0mm Thread Pitch
ISCG TABS:	ISCG05
SEATPOST DIAMETER:	31.6mm
SEAT CLAMP:	34.9mm
MAX SEATPOST INSERTION:	Small 200mm   Medium 230mm   Large 270mm   X-Large 300mm
MAX CHAINRING SIZE:	34T Standard Single Ring (Based on 52mm Boost Chainline)
MAX TIRE SIZE:	27.5 x 2.6
REAR SHOCK SAG:	160mm/60mm: 16-20mm (27-33%) 170mm/65mm: 18-22mm (28-34%)

TELAIO VENDUTO CON AMMORTIZZATORE: Fox FLOAT X2 FACTORY 2 POSITION



PATROL GX



RAW



BLUEBERRY

	PATROL ALLOY XT	PATROL ALLOY GX	PATROL ALLOY DEORE	PATROL ALLOY NX
TELAIO	Patrol Alloy 160mm	Patrol Alloy 160mm	Patrol Alloy 160mm	Patrol Alloy 160mm
AMMORTIZZATORE	Fox Float X2 Factory 2 Position (160mm /205x60mm)	RockShox Super Deluxe Ultimate Air (160mm /205x60mm)	Fox Float DPX2 Performance (160mm /205x60mm)	Fox Float X Performance 2 Position (160mm /205x60mm)
FORCELLA	Fox Float 38 Grip 2 Factory 29 (160mm /44mm Offset)	RockShox ZEB Ultimate 29 (160mm /44mm Offset)	Marzocchi Bomber Z1 Air 29 (160mm /44mm Offset)	Marzocchi Bomber Z1 Air 29 (160mm /44mm Offset)
SERIE STERZO	FSA NO55R/57	FSA NO55R/57	FSA NO55R/57	FSA NO55R/57
ATTACCO MANUBRIO	ANVL Swage (40mm)	ANVL Swage (40mm)	RaceFace Aeffect R (40mm)	RaceFace Aeffect R (40mm)
MANUBRIO	ANVL Mandrel Alloy	ANVL Mandrel Alloy	RaceFace Chester	RaceFace Chester
MANOPOLE	Sensus Lite	Sensus Lite	Sensus Lite	ODI Elite Flow Lock-On
SELLA	ANVL Forge Cromo or WTB Silverado	ANVL Forge Cromo or WTB Silverado	ANVL Forge Cromo or WTB Silverado Cromo	ANVL Forge Cromo or WTB Silverado Cromo
REGGISELLA	OneUp Dropper Post	OneUp Dropper Post	OneUp Dropper Post	OneUp Dropper Post
FRENI	Shimano XT M8120	SRAM Code RSC	Shimano Deore M6120	SRAM Guide RE
DISCHI FRENI	Shimano RT86 (203mm)	SRAM Centerline (200mm)	Shimano RT70 (203mm)	SRAM Centerline (200mm)
COMANDO CAMBIO	Shimano XT M8100	SRAM GX Eagle	Shimano Deore M6100	SRAM NX Eagle MMX
CAMBIO	Shimano XT M8100	SRAM GX Eagle	Shimano Deore M6100	SRAM NX Eagle
PACCO PIGNONI	Shimano XT M8100 (10-51t)	SRAM XG 1275 (10-52t)	Shimano Deore M6100 (10-51t)	SRAM PG 1230 (11-50t)
CATENA	Shimano XT M8100	SRAM GX Eagle	Shimano Deore M6100	SRAM NX Eagle
GUARNITURA	Shimano XT M8100 (32t/165mm)	SRAM GX Alloy DUB (32t/165mm)	RaceFace Aeffect R (32t/165mm)	SRAM Descendent 6k (32t/165mm)
GUIDACATENA	OneUp Bash Guide	OneUp Bash Guide	OneUp Bash Guide	OneUp Bash Guide
RUOTE	DT Swiss EX 1700 Spline 30	Stans Flow S1	Stans Flow D	Stans Flow D
PNEUMATICO ANT	Schwalbe Magic Mary, Super Trail, Soft (29x2.4)	Schwalbe Magic Mary, Super Trail, Soft (29x2.4)	Schwalbe Magic Mary, Super Trail, Soft (29x2.4)	Schwalbe Magic Mary, Super Trail, Soft (29x2.4)
PNEUMATICO POST	Schwalbe Big Betty, Super Trail, Soft (27.5x2.4)	Schwalbe Big Betty, Super Trail, Soft (27.5x2.4)	Schwalbe Big Betty, Super Trail, Soft (27.5x2.4)	Schwalbe Big Betty, Super Trail, Soft (27.5x2.4)
ALTRO	Tubeless Valves & Stans Sealant (6oz)	Tubeless Valves & Stans Sealant (6oz)	Tubeless Valves & Stans Sealant (6oz)	Tubeless Valves & Stans Sealant (6oz)
PESO	15.69 kg (Size MD)	-	-	-

\* LE SPECIFICHE DI MONTAGGIO POSSONO VARIARE SENZA PREAVVISO. PER CONSULTARE I KIT DI MONTAGGIO AGGIORNATI VISITA IL SITO WWW.TRANSITIONBIKES.COM

# SPUR


29" WHEELS  
120MM REAR / 120MM FRONT

**COLORI DISPONIBILI:**

BLACK POWDER

DEEP SEA GREEN

TAGLIE: S / M / L / XL

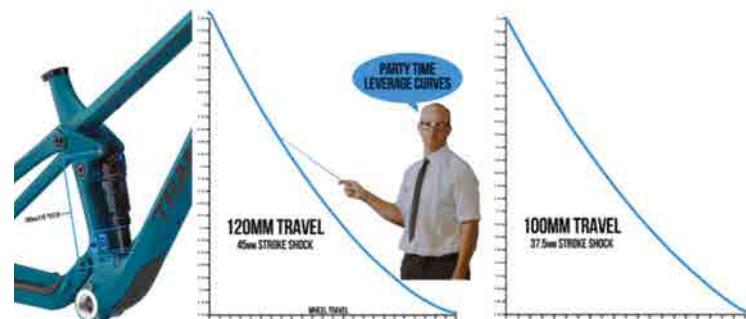

**FRAME & TECH INFO**

REAR TRAVEL:	120mm (Compatible with 100mm)
FRONT TRAVEL:	120mm
WHEEL SIZE:	29"
SIZES:	SM, MD, LG, XL
COLORS:	Deep Sea Green, Black Powder
FRAME BEARINGS:	2x 6903, 4x 6901
FORK AXLE TO CROWN:	533mm (Includes headset)
FORK OFFSET:	44mm
REAR SHOCK SIZE:	190mm x 45mm (Compatible with 190mm x 37.5mm)
SHOCK HARDWARE:	30mm x 8mm Top / 25mm x 8mm Bottom
HEADSET (TOP):	44mm Zero Stack
HEADSET (BOTTOM):	56mm Zero Stack
BB SHELL:	73mm BSA Threaded
CHAINLINE:	52mm
REAR BRAKE MOUNT:	160mm Post Mount, Max Rotor Size 180mm
REAR AXLE:	Syntace X12 148 (Boost), 1.0mm Thread Pitch
ISCG TABS:	ISCG05 (Top/Front 2 mounts only)
SEATPOST DIAMETER:	31.6mm
SEAT CLAMP:	37.0mm
MAX SEATPOST INSERTION:	Small 250mm   Medium 280mm   Large 330mm   XL 330mm
MAX CHAINRING SIZE:	36T Standard Single Ring
MAX TIRE SIZE:	29 x 2.4
REAR SHOCK SAG:	120mm (45mm) = 12-15mm (27-33%) 100mm (37.5mm) = 10-12mm (27-33%)

TELAIO VENDUTO CON AMMORTIZZATORE: RockShox SIDLuxe Ultimate



IMMAGINE INDICATIVA



BLACK POWDER



DEEP SEA GREEN

	SPUR CARBON AXS	SPUR CARBON GX	SPUR CARBON NX
TELAIO	Spur Carbon 120mm	Spur Carbon 120mm	Spur Carbon 120mm
AMMORTIZZATORE	RockShox SIDLuxe Ultimate	RockShox SIDLuxe Ultimate	RockShox Super Deluxe Select+
FORCELLA	RockShox SID Ultimate 120mm Travel/44mm Offset	RockShox SID Ultimate 120mm Travel/44mm Offset	RockShox SID Select 120mm Travel/44mm Offset
SERIE STERZO	FSA No57E	FSA No57E	FSA No57E
ATTACCO MANUBRIO	ANVL Swage (40mm)	ANVL Swage (40mm)	RaceFace Aeffect R (40mm)
MANUBRIO	OneUp Carbon Bar SM/MD (800x20) LG/XL (800x35)	ANVL Mandrel Alloy 35 SM/MD (800x20) LG/XL (800x30)	RaceFace Aeffect R (780mm x 20mm)
MANOPOLE	ODI Elite Flow Lock-On	ODI Elite Flow Lock-On	ODI Elite Flow Lock-On
SELLA	ANVL Forge Cromo	ANVL Forge Cromo	ANVL Forge Cromo
REGGISSELLA	OneUp Dropper Post	OneUp Dropper Post	OneUp Dropper Post
FRENI	SRAM G2 RSC	SRAM G2 RSC	SRAM G2 R
DISCHI FRENI	SRAM HS1 (180mm)	SRAM Centerline (180mm)	SRAM Centerline (180mm)
COMANDO CAMBIO	SRAM GX AXS Rocker	SRAM GX Eagle	SRAM NX Eagle MMX
CAMBIO	SRAM GX AXS	SRAM GX Eagle	SRAM NX Eagle
PACCO PIGNONI	SRAM XG 1295 (10-52t)	SRAM XG 1275 (10-52t)	SRAM PB 1230 (10-50t)
CATENA	SRAM XX1 Black SRAM X01 Carbon DUB (32t/170mm)	SRAM GX Eagle SRAM GX Eagle DUB (32t/170mm)	SRAM NX Eagle SRAM Stylo 6K DUB (32t/170mm)
GUARNITURA	DT Swiss XRC 1501 Spline 30 Carbon	DT Swiss XR 1700 Spline 25	Stans Arch D
RUOTE	Maxxis Dissector 3C EXO (29x2.4)	Maxxis Dissector 3C EXO (29x2.4)	Maxxis Dissector 3C EXO (29x2.4)
PNEUMATICO ANT	Maxxis Rekon 3C EXO (29x2.4)	Maxxis Rekon 3C EXO (29x2.4)	Maxxis Rekon 3C EXO (29x2.4)
PNEUMATICO POST	SRAM AXS Battery Charger, Tubeless Valves & Stans Sealant (6oz)	SRAM AXS Battery Charger, Tubeless Valves & Stans Sealant (6oz)	SRAM AXS Battery Charger, Tubeless Valves & Stans Sealant (6oz)
ALTRO		Tubeless Valves & Stans Sealant (6oz)	Tubeless Valves & Stans Sealant (6oz)
PESO	11.2 kg (Size MD)	11.4 kg (Size MD)	12.2 kg (Size MD)

\* LE SPECIFICHE DI MONTAGGIO POSSONO VARIARE SENZA PREAVVISO. PER CONSULTARE I KIT DI MONTAGGIO AGGIORNATI VISITA IL SITO WWW.TRANSITIONBIKES.COM

# SENTINEL


29" WHEELS  
150MM REAR / 160MM FRONT

COLORI DISPONIBILI:

TI GREY

LOAM GOLD

TAGLIE: S / M / L / XL / XXL

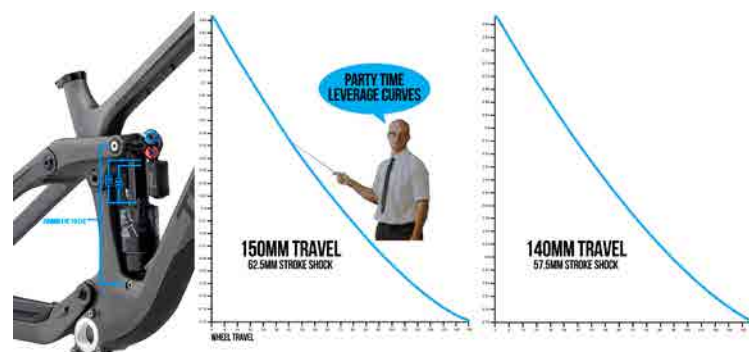

### FRAME & TECH INFO

REAR TRAVEL:	150mm (Compatible with 140mm)
FRONT TRAVEL:	160mm
WHEEL SIZE:	29"
SIZES:	SM, MD, LG, XL, XXL
COLORS:	Loam Gold, Ti Grey
FRAME BEARINGS:	2x 6903, 2x 6902, 4x 6802, 2x 3802, 2x 6900
FORK AXLE TO CROWN:	574mm (Includes headset)
FORK OFFSET:	42-44mm
REAR SHOCK SIZE:	205mm x 62.5mm (Compatible with 205mm x 57.5mm)
SHOCK HARDWARE:	Trunion Mount Top / 25mm x 8mm Bottom
HEADSET (TOP):	44mm Zero Stack
HEADSET (BOTTOM):	56mm Zero Stack
BB SHELL:	73mm BSA Threaded
CHAINLINE:	52mm
REAR BRAKE MOUNT:	180mm Post Mount, Max Rotor Size 203mm
REAR AXLE:	Syntace X12 148, 1.0mm Thread Pitch
ISCG TABS:	ISCG05
SEATPOST DIAMETER:	31.6mm
SEAT CLAMP:	37.0mm
MAX SEATPOST INSERTION:	Small 220mm   Medium 250mm   Large 290mm   XL 320mm   XXL 350mm
MAX CHAINRING SIZE:	32T Standard Single Ring
MAX TIRE SIZE:	29 x 2.6
REAR SHOCK SAG:	150mm/62.5mm: 16-20mm (26-32%) 140mm/57.5mm: 15-19mm (26-33%)

TELAIO VENDUTO CON AMMORTIZZATORE: Fox Float X2 Factory 2 Position



IMMAGINE INDICATIVA



TI GREY

	SENTINEL CARBON GX AXS	SENTINEL CARBON GX
TELAIO	Sentinel Carbon 150mm	Sentinel Carbon 150mm
AMMORTIZZATORE	Fox Float X2 Factory 2 Position	Fox Float X Perf. Elite 2 Position
FORCELLA	Fox Float 36 Grip 2 Factory (160mm Travel/44mm Offset)*	Fox Float 36 Grip 2 Performance Elite (160mm Travel/44mm Offset)
SERIE STERZO	FSA No57E	FSA No57E
ATTACCO MANUBRIO	ANVL Swage (40mm)	ANVL Swage (40mm)
MANUBRIO	*OneUp Carbon Bar	ANVL Mandrel Alloy 35
MANOPOLE	ODI Elite Flow Lock-On	ODI Elite Flow Lock-On
SELLA	ANVL Forge Cromo OneUp Dropper Post	ANVL Forge Cromo OneUp Dropper Post
REGGISSELLA	SM (150mm) MD (180mm) LG/XL/XXL (210mm)	SM (150mm) MD (180mm) LG/XL/XXL (210mm)
FRENI	TRP DH-R EVO	TRP DH-R EVO
DISCHI FRENI	TRP R1 2.3 (203mm)	TRP R1 2.3 (203mm)
COMANDO CAMBIO	SRAM GX AXS	SRAM GX Eagle
CAMBIO	SRAM GX AXS	SRAM GX Eagle
PACCO PIGNONI	SRAM XG 1295 (10-52t)	SRAM XG 1275 (10-52t)
CATENA	SRAM XX1 Black	SRAM GX Eagle
GUARNITURA	SRAM Descendent Carbon (30t/170mm)	SRAM GX Eagle DUB (30t/170mm)
RUOTE	DT Swiss XM 1700 Spline 30	DT Swiss M 1900 Spline 30
PNEUMATICO ANT	Maxxis Assegai 3C EXO+ (29x2.5)	Maxxis Assegai 3C EXO+ (29x2.5)
PNEUMATICO POST	Maxxis Minion DHR11 3C EXO+ (29x2.4)	Maxxis Minion DHR11 3C EXO+ (29x2.4)
INCLUSO	Tubeless Valves & Stans Sealant (6oz)	Tubeless Valves & Stans Sealant (6oz)
PESO	-	31.3 lbs / 14.21kg (Size Md)

\* LE SPECIFICHE DI MONTAGGIO POSSONO VARIARE SENZA PREAVVISO. PER CONSULTARE I KIT DI MONTAGGIO AGGIORNATI VISITA IL SITO WWW.TRANSITIONBIKES.COM



# SENTINEL ALLOY

29" WHEELS


150MM REAR / 160MM FRONT

COLORI DISPONIBILI:

PLATINUM SILVER

CASCADE BLUE

TAGLIE: S / M / L / XL / XXL

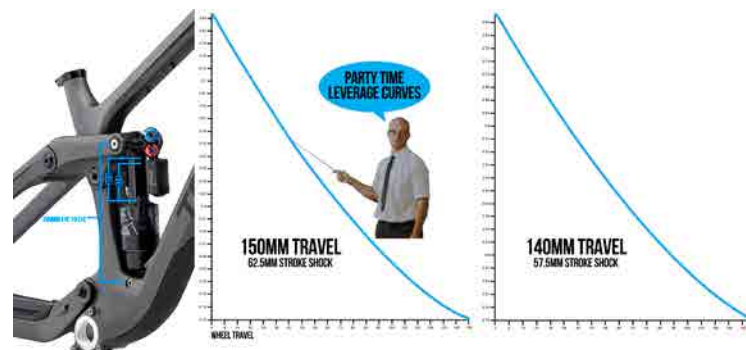

### FRAME & TECH INFO

REAR TRAVEL:	150mm (Compatible with 140mm)
FRONT TRAVEL:	160mm
WHEEL SIZE:	29"
SIZES:	SM, MD, LG, XL, XXL
COLORS:	Platinum Silver / Cascade Blue
FRAME BEARINGS:	2x 6903, 2x 6902, 4x 6802, 2x 3802, 2x 6900
FORK AXLE TO CROWN:	574mm (Includes headset)
FORK OFFSET:	42-44mm
REAR SHOCK SIZE:	205mm x 62.5mm (Compatible with 205mm x 57.5mm)
SHOCK HARDWARE:	Trunion Mount Top / 25mm x 8mm Bottom
HEADSET (TOP):	44mm Zero Stack
HEADSET (BOTTOM):	56mm Zero Stack
BB SHELL:	73mm BSA Threaded
CHAINLINE:	52mm
REAR BRAKE MOUNT:	180mm Post Mount, Max Rotor Size 203mm
REAR AXLE:	Syntace X12 148, 1.0mm Thread Pitch
ISCG TABS:	ISCG05
SEATPOST DIAMETER:	31.6mm
SEAT CLAMP:	37.0mm
MAX SEATPOST INSERTION:	-
MAX CHAINRING SIZE:	32T Standard Single Ring
MAX TIRE SIZE:	29 x 2.6
REAR SHOCK SAG:	150mm/62.5mm: 16-20mm (26-32%) 140mm/57.5mm: 15-19mm (26-33%)

TELAIO VENDUTO CON AMMORTIZZATORE: FOX FLOAT X PERFORMANCE ELITE 2 POSITION



SENTINEL ALLOY NX



PLATINUM SILVER



	SENTINEL ALLOY GX	SENTINEL ALLOY NX
TELAIO	Sentinel Alloy 150mm	Sentinel Carbon 150mm
AMMORTIZZATORE	Fox Float X Perf Elite 2 Position	Fox Float X Performance 2 Position
FORCELLA	Fox Float 36 Grip 2 Performance Elite (160mm Travel/44mm Offset)*	Fox Float 36 Rhythm (160mm Travel/44mm Offset)
SERIE STERZO	FSA No57E	FSA No57E
ATTACCO	ANVL Swage (40mm)	RaceFace Aeffect R (40mm)
MANUBRIO	ANVL Mandrel Alloy 35	RaceFace Chester 35
MANOPOLE	ODI Elite Flow Lock-On	ODI Elite Flow Lock-On
SELLA	ANVL Forge Cromo OneUp Dropper Post	ANVL Forge Cromo OneUp Dropper Post
REGGISSELLA	SM (150mm) MD (180mm) LG/XL/XXL (210mm)	SM (150mm) MD (180mm) LG/XL/XXL (210mm)
FRENI	TRP DH-R EVO	SRAM Guide RE
DISCHI FRENI	TRP R1 2.3 (203mm)	SRAM Centerline
COMANDO CAMBIO	SRAM GX AXS	SRAM NX Eagle MMX
CAMBIO	SRAM GX AXS	SRAM NX Eagle
PACCO PIGNONI	SRAM XG 1275 (10-52t)	SRAM PG 1230 (11-50t)
CATENA	SRAM GX Eagle	SRAM NX Eagle
GUARNITURA	SRAM GX Eagle DUB (30t/170mm)	SRAM Descendent 6k DUB (30t/170mm)
RUOTE	DT Swiss M 1900 Spline 30	Stans Flow D / Novatech
PNEUMATICO ANT	Maxxis Assegai 3C EXO+ (29x2.5)	Maxxis Assegai 3C EXO+ (29x2.5)
PNEUMATICO POST	Maxxis Minion DHR11 3C EXO+ (29x2.4)	Maxxis Minion DHR11 3C EXO+ (29x2.4)
INCLUSO	Tubeless Valves & Stans Sealant (6oz)	Tubeless Valves & Stans Sealant (6oz)
PESO	-	-

\* LE SPECIFICHE DI MONTAGGIO POSSONO VARIARE SENZA PREAVVISO. PER CONSULTARE I KIT DI MONTAGGIO AGGIORNATI VISITA IL SITO WWW.TRANSITIONBIKES.COM



# SCOUT


27.5" WHEELS  
140MM REAR / 150MM FRONT

COLORI DISPONIBILI:

OLIVE GREEN

MIDNIGHT BLUE

TAGLIE: XS / S / M / L / XL

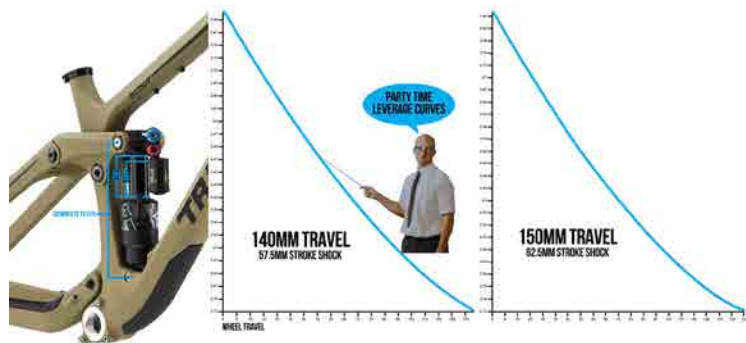

### FRAME & TECH INFO

REAR TRAVEL:	140mm (Compatible with 150mm)
FRONT TRAVEL:	150mm
WHEEL SIZE:	27.5"
SIZES:	XS, SM, MD, LG, XL
COLORS:	Midnight Blue, Olive Green
FRAME BEARINGS:	2x 6903, 2x 6902, 4x 6802, 2x 3802, 2x 6900
FORK AXLE TO CROWN:	545mm
FORK OFFSET:	37mm
REAR SHOCK SIZE:	205mm x 57.5mm (Compatible with a 205mm x 62.5mm shock)
SHOCK HARDWARE:	Trunion Mount Top / 25mm x 8mm Bottom
HEADSET (TOP):	44mm Zero Stack
HEADSET (BOTTOM):	56mm Zero Stack
BB SHELL:	73mm BSA Threaded
CHAINLINE:	52mm
REAR BRAKE MOUNT:	180mm Post Mount
REAR AXLE:	Syntace X12 148, with a 1.0mm thread pitch
ISCG TABS:	ISCG05
SEATPOST DIAMETER:	31.6mm
SEAT CLAMP:	37.0mm
MAX SEATPOST INSERTION:	XS 210mm   Small 220mm   Medium 250mm   Large 290mm   XL 320mm
MAX CHAINRING SIZE:	34T Single Ring
MAX TIRE SIZE:	27.5 x 2.6
REAR SHOCK SAG:	140mm/57.5mm: 15-19mm (26-33%) 150mm/62.5mm: 16-20mm (26-32%)

TELAIO VENDUTO CON AMMORTIZZATORE: Fox Float X2 Factory 2 Position



IMMAGINE INDICATIVA



SCOUT CARBON GX	
TELAIO	Fox Float X Perf. Elite 2Position
AMMORTIZZATORE	Fox Float X Perf. Elite 2 Position
FORCELLA	Fox Float 36 Grip 2 Performance Elite (150mm Travel/37mm Offset)
SERIE STERZO	Cane Creek 40 Series
ATTACCO MANUBRIO	ANVL Swage (40mm)
MANUBRIO	OneUp Carbon Bar
MANOPOLE	XS/SM (800x20) MD/LG/XL (800x35)
SELLA	ODI Elite Flow Lock-On
REGGISELLA	ANVL Forge Cromo OneUp Dropper Post XS (120mm) SM (150mm) MD (180mm) LG/XL (210mm)
FRENI	TRP DH-R EVO
DISCHI FRENI	TRP R1 2.3 (180mm)
COMANDO CAMBIO	SRAM GX Eagle
CAMBIO	SRAM GX Eagle
PACCO PIGNONI	SRAM XG 1275 (10-52t)
CATENA	SRAM GX Eagle
QUARNITURA	SRAM GX Eagle DUB (32t/170mm, XS 165mm)
RUOTE	DT Swiss M 1900 Spline 30
PNEUMATICO ANT	Maxxis Assegai 3C EXO+ (27.5x2.5)
PNEUMATICO POST	Maxxis Minion DHRII 3C EXO+ (27.5x2.4)
INCLUSO	Tubeless Valves & Stans Sealant (6oz)
PESO	30.4 lbs / 13.79kg (Size MD)

\* LE SPECIFICHE DI MONTAGGIO POSSONO VARIARE SENZA PREAVVISO. PER CONSULTARE I KIT DI MONTAGGIO AGGIORNATI VISITA IL SITO WWW.TRANSITIONBIKES.COM



# SCOUT ALLOY


27.5" WHEELS  
140MM REAR / 150MM FRONT

COLORI DISPONIBILI:

RASPBERRY

CLASSY BLACK

TAGLIE: XS / S / M / L

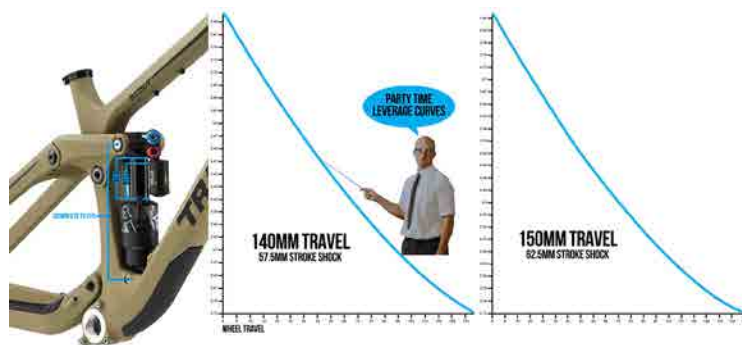

## FRAME & TECH INFO

REAR TRAVEL:	140mm (Compatible with 150mm)
FRONT TRAVEL:	150mm
WHEEL SIZE:	27.5"
SIZES:	XS, SM, MD, LG, XL
COLORS:	Raspberry / Classy Black
FRAME BEARINGS:	2x 6903, 2x 6902, 4x 6802, 2x 3802, 2x 6900
FORK AXLE TO CROWN:	545mm
FORK OFFSET:	37mm
REAR SHOCK SIZE:	205mm x 57.5mm (Compatible with a 205mm x 62.5mm shock)
SHOCK HARDWARE:	Trunion Mount Top / 25mm x 8mm Bottom
HEADSET (TOP):	44mm Zero Stack
HEADSET (BOTTOM):	56mm Zero Stack
BB SHELL:	73mm BSA Threaded
CHAINLINE:	52mm
REAR BRAKE MOUNT:	180mm Post Mount
REAR AXLE:	Syntace X12 148, with a 1.0mm thread pitch
ISCG TABS:	ISCG05
SEATPOST DIAMETER:	31.6mm
SEAT CLAMP:	37.0mm
MAX SEATPOST INSERTION:	-
MAX CHAINRING SIZE:	34T Single Ring
MAX TIRE SIZE:	27.5 x 2.6
REAR SHOCK SAG:	140mm/57.5mm: 15-19mm (26-33%) 150mm/62.5mm: 16-20mm (26-32%)

TELAIO VENDUTO CON AMMORTIZZATORE: Fox Float X2 Factory 2 Position



SCOUT ALLOY NX



PLATINUM SILVER



	SCOUT ALLOY GX	SCOUT ALLOY NX
TELAIO	Scout Alloy 140mm	Scout Alloy 140mm
AMMORTIZZATORE	Fox Float X Performance Elite 2 Pos	Fox Float X Performance 2 Position
FORCELLA	Fox Float 36 Grip 2 Performance Elite (150mm Travel/37mm Offset)	Fox Float 36 Rhythm (150mm Travel/37mm Offset)
SERIE STERZO	FSA No57E	FSA No57E
ATTACCO	ANVL Swage (40mm)	RaceFace Aeffect R (40mm)
MANUBRIO	ANVL Mandrel Alloy 35	RaceFace Chester 35
MANUBRIO	ODI Elite Flow Lock-On	ODI Elite Flow Lock-On
MANOPOLE	ANVL Forge Cromo	ANVL Forge Cromo
SELLA	OneUp Dropper Post	OneUp Dropper Post
REGGISSELLA	XS (120mm) SM (150mm) MD (180mm) LG/XL (210mm)	XS (120mm) SM (150mm) MD (180mm) LG/XL (210mm)
FRENI	TRP DH-R EVO	SRAM Guide RE
DISCHI FRENI	TRP R1 2.3 (203mm)	SRAM Centerline
COMANDO CAMBIO	SRAM GX AXS	SRAM NX Eagle MMX
CAMBIO	SRAM GX AXS	SRAM NX Eagle
PACCO PIGNONI	SRAM XG 1275 (10-52t)	SRAM PG 1230 (11-50t)
CATENA	SRAM GX Eagle	SRAM NX Eagle
GUARNITURA	SRAM GX Eagle DUB (32t/170mm, XS 165mm)	SRAM Descendent 6K DUB (32t/170mm, XS 165mm)
RUOTE	DT Swiss M 1900 Spline 30	Stans Flow D / Novatech
PNEUMATICO ANT	Maxxis Assegai 3C EXO+ (29x2.5)	Maxxis Assegai 3C EXO+ (29x2.5)
PNEUMATICO POST	Maxxis Minion DHR11 3C EXO+ (29x2.4)	Maxxis Minion DHR11 3C EXO+ (29x2.4)
INCLUSO	Tubeless Valves & Stans Sealant (6oz)	Tubeless Valves & Stans Sealant (6oz)
PESO	-	-

\* LE SPECIFICHE DI MONTAGGIO POSSONO VARIARE SENZA PREAVVISO. PER CONSULTARE I KIT DI MONTAGGIO AGGIORNATI VISITA IL SITO WWW.TRANSITIONBIKES.COM

# RIPCORD ALLOY

**24" WHEELS**  
100MM REAR / 100MM FRONT

COLORI DISPONIBILI:

- RAW
- GRAPE AND TEAL
- LOAM GOLD

TAGLIA UNICA



GRAPE AND TEAL



LOAM GOLD



RIPCORD	
TELAIO	Ripcord Alloy 100mm
AMMORTIZZATORE	RockShox Monarch R
FORCELLA	RockShox Judy Silver TK 26 (100mm, 40mm Offset)
SERIE STERZO	FSA ZS44
ATTACCO	Spark Spoon (40mm)
MANUBRIO	RaceFace Ride 31.8 (710mm x 25mm)
MANOPOLE	Velo Single Clamp
SELLA	WTB Volt
REGGISSELLA	JD SP66
FRENI	Shimano MT410
DISCHI FRENI	Shimano RT56 (160mm)
COMANDO CAMBIO	SRAM NX 11spd
CAMBIO	SRAM NX 11spd
PACCO PIGNONI	SRAM PG1130 (11-42t)
CATENA	SRAM PC 1110
GUARNITURA	SRAM X1 1000 DUB (30t, 155mm)
RUOTE	Stans Arch D / Formula DC91/DC32
PNEUMATICO ANT	Maxxis Minion DHF 3C (24x2.4)
PNEUMATICO POST	Maxxis Minion DHR 3C (24x2.4)
PESO	28.8 lbs / 13 kg

### FRAME & TECH INFO

REAR TRAVEL:	475 mm	HEADSET (BOTTOM):	44mm Zero Stack
FRONT TRAVEL:	39 mm	BB SHELL:	73mm BSA Threaded
WHEEL SIZE:	44mm Zero Stack	CHAINLINE:	50mm
FRAME MATERIAL:	73mm BSA Threaded	REAR BRAKE MOUNT:	IS Mount
SIZES:	160mm Post Mount	REAR AXLE:	10 x 135mm
COLORS:	10 x 135	ISCG TABS:	ISCG05
FRAME BEARINGS:	ISCG05	SEATPOST DIAMETER:	31.6mm
FORK AXLE TO CROWN:	31.6 mm	SEAT CLAMP:	34.9mm
FORK OFFSET:	225 mm	MAX CHAINRING SIZE:	34T Single Ring
REAR SHOCK SIZE:	349 mm	MAX TIRE SIZE:	2.5 x 24"
SHOCK HARDWARE:	32t Single	SHOCK SAG:	30%
HEADSET (TOP):	2.5x24"		

# PBJ CHROMOLY

**26" WHEELS**  
100MM FRONT

COLORI DISPONIBILI:

- RAW STEEL
- BLACK AND COPPER
- AQUA BLUE

TAGLIE: S / L / XL



PBJ	
TELAIO	PBJ Chromoly/100mm Front
FORCELLA	RockShox Pike DJ 26 (100mm)
SERIE STERZO	FSA No10/7B/44
ATTACCO MANUBRIO	Transition DJ
MANUBRIO	Kore Torsion 31.8 (760mm x 50mm)
MANOPOLE	Velo Single Clamp
SELLA	Transition Pivotal DJ
REGGISSELLA	Velo Plastic Pivotal
FRENI	SRAM Level (Solo Posteriore)
DISCHI FRENI	SRAM Centerline (160mm)
PIGNONE	12t Single Cog
CATENA	KMC HL710
GUARNITURA	Samox BMX 3 pc (25t, 170mm)
RUOTE	Kinlin DDT32 26 Rim/Joytec D941SB & D236SBT
PNEUMATICO ANT	Maxxis DTH (26x2.3)
PNEUMATICO POST	Maxxis DTH (26x2.3)
PESO	11.74 kg

### FRAME & TECH INFO

FORK AXLE TO CROWN	482 mm
FORK OFFSET	40 mm
HEADSET	44mm Zero Stack
BOTTOM BRACKET	73mm BSA Threaded
REAR BRAKE	160mm Post Mount
REAR AXLE	10 x 135
ISCG TABS	None
SEATPOST DIAMETER	27.2 mm
SEAT CLAMP	Built in bolt
MAXIMUM CHAINRING	32t Single
MAXIMUM TIRE	2.3x26"

# GEOMETRIE

SPIRE CARBON\ALLOY	S		M		L		XL		XXL	
	LOW SETTING	HIGH SETTING	LOW SETTING	HIGH SETTING	LOW SETTING	HIGH SETTING	LOW SETTING	HIGH SETTING	LOW SETTING	HIGH SETTING
REACH	425	430	455	460	480	485	505	510	530	535
STACK	624	619	624	619	633	628	642	637	651	646
EFFECTIVE TT LENGTH	550	547	580	577	608	605	636	633	664	661
SEAT TUBE LENGTH	360	360	390	390	430	430	460	460	490	490
EFFECTIVE ST ANGLE	79,1	79,6	78,3	78,8	77,6	78,1	77,0	77,5	76,7	77,2
SADDLE HEIGHT FOR EFFECTIVE ST ANGLE	600	600	660	660	720	720	780	780	820	820
ACTUAL ST ANGLE	70,0	70,5	70,0	70,5	70,0	70,5	70,0	70,5	70,0	70,5
SEAT TUBE OFFSET AT BB	100	100	100	100	100	100	100	100	100	100
HEAD TUBE LENGTH	100	100	100	100	110	110	120	120	130	130
HEAD TUBE ANGLE	62,5	63,0	62,5	63,0	62,5	63,0	62,5	63,0	62,5	63,0
CHAINSTAY LENGTH	448	446	448	446	448	446	454	452	454	452
WHEELBASE	1229	1227	1259	1257	1289	1287	1324	1322	1354	1352
BOTTOM BRACKET DROP	32	25	32	25	32	25	32	25	32	25
ESTIMATED BB HEIGHT	343	350	343	350	343	350	343	350	343	350
STAND OVER HEIGHT	685	685	700	700	715	715	730	730	745	745
FORK OFFSET	44	44	44	44	44	44	44	44	44	44

PATROL ALLOY	S		M		L		XL	
	LOW SETTING	HIGH SETTING	LOW SETTING	HIGH SETTING	LOW SETTING	HIGH SETTING	LOW SETTING	HIGH SETTING
REACH	415	420	450	455	475	480	505	510
STACK	628	623	628	623	637	632	646	641
EFFECTIVE TT LENGTH	543	540	578	575	606	603	639	636
SEAT TUBE LENGTH	360	360	390	390	430	430	460	460
EFFECTIVE ST ANGLE	79,1	79,6	78,3	78,8	77,6	78,1	77,0	77,5
SADDLE HEIGHT FOR EFFECTIVE ST ANGLE	600	600	660	660	720	720	780	780
ACTUAL ST ANGLE	70,0	70,5	70,0	70,5	70,0	70,5	70,0	70,5
SEAT TUBE OFFSET AT BB	100	100	100	100	100	100	100	100
HEAD TUBE LENGTH	100	100	100	100	110	110	120	120
HEAD TUBE ANGLE	63,0	63,5	62,5	63,5	62,5	63,5	62,5	63,5
CHAINSTAY LENGTH	436	434	436	434	442	440	442	440
WHEELBASE	1198	1196	1233	1231	1268	1266	1303	1301
BOTTOM BRACKET DROP	22	15	22	15	22	15	22	15
ESTIMATED BB HEIGHT	333	340	333	340	333	340	333	340
STAND OVER HEIGHT	685	675	700	690	715	705	730	720
FORK OFFSET	44	44	44	44	44	44	44	44

SPUR CARBON	S	M	L	XL
	REACH	425	455	480
STACK	600	610	619	632
EFFECTIVE TT LENGTH	569	602	630	664
SEAT TUBE LENGTH	380	410	460	500
EFFECTIVE ST ANGLE	76,7°	76,2°	75,9°	75,6°
SADDLE HEIGHT FOR EFFECTIVE ST ANGLE	600	660	720	780
ACTUAL ST ANGLE	72°	72°	72°	72°
SEAT TUBE OFFSET AT BB	51	51	51	51
HEAD TUBE LENGTH	100	110	120	135
HEAD TUBE ANGLE	66,0°	66,0°	66,0°	66,0°
CHAINSTAY LENGTH	435	435	435	435
WHEELBASE	1156	1190	1219	1255
BOTTOM BRACKET DROP	40	40	40	40
ESTIMATED BB HEIGHT	335	335	335	335
STAND OVER HEIGHT	662	667	670	677
FORK OFFSET	44	44	44	44

SCOUT CARBON	XS	S	M	L	XL
	REACH	410	435	460	485
STACK	577	590	604	617	631
EFFECTIVE TT LENGTH	534	564	593	623	652
SEAT TUBE LENGTH	350	360	390	430	460
EFFECTIVE ST ANGLE	78,2°	77,7°	77,2°	76,8°	76,4°
SADDLE HEIGHT FOR EFFECTIVE ST ANGLE	560	600	660	720	780
ACTUAL ST ANGLE	72°	72°	72°	72°	72°
SEAT TUBE OFFSET AT BB	63	63	63	63	63
HEAD TUBE LENGTH	95	110	125	140	155
HEAD TUBE ANGLE	64,0°	64,0°	64,0°	64,0°	64,0°
CHAINSTAY LENGTH	430	430	430	430	430
WHEELBASE	1153	1185	1217	1248	1280
BOTTOM BRACKET DROP	18	18	18	18	18
ESTIMATED BB HEIGHT	337	337	337	337	337
STAND OVER HEIGHT	665	665	673	686	698
FORK OFFSET	37	37	37	37	37

RIPCORD ALLOY	ONE SIZE
REACH	366
STACK	503
EFFECTIVE TOPTUBE	510
SEAT TUBE LENGTH	317
EFFECTIVE ST ANGLE	74
HEAD TUBE LENGTH	90
HEAD TUBE ANGLE	67
CHAINSTAY LENGTH	381
WHEELBASE	1005
BOTTOM BRACKET DROP	-5

SENTINEL CARBON	S	M	L	XL	XXL
	REACH	420	450	476	501
STACK	613	622	631	640	649
EFFECTIVE TT LENGTH	552	585	613	641	665
SEAT TUBE LENGTH	350	390	430	460	490
EFFECTIVE ST ANGLE	78,2°	77,5°	76,9°	76,4°	76,0°
SADDLE HEIGHT FOR EFFECTIVE ST ANGLE	600	660	720	780	820
ACTUAL ST ANGLE	70,8°	70,8°	70,8°	70,8°	70,8°
SEAT TUBE OFFSET AT BB	87	87	87	87	87
HEAD TUBE LENGTH	100	110	120	130	140
HEAD TUBE ANGLE	63,6°	63,6°	63,6°	63,6°	63,6°
CHAINSTAY LENGTH	440	440	440	440	440
WHEELBASE	1199	1233	1263	1292	1316
BOTTOM BRACKET DROP	29	29	29	29	29
ESTIMATED BB HEIGHT	346	346	346	347	347
STAND OVER HEIGHT	671	688	700	712	722
FORK OFFSET	43	43	43	43	43

PBJ Chromoly	SHORT	LONG	X-LONG
	REACH	415	440
STACK	569	569	569
EFFECTIVE TT LENGTH	600	625	650
SEAT TUBE LENGTH	338	338	338
EFFECTIVE ST ANGLE	72,0°	72,0°	72,0°
HEAD TUBE LENGTH	110	110	110
HEAD TUBE ANGLE	68,5°	68,5°	68,5°
CHAINSTAY LENGTH	388	388	400
WHEELBASE	1062	1087	1124
BOTTOM BRACKET DROP	20	20	20
ESTIMATED BB HEIGHT	320	320	320
STANDOVER	620	620	620
FORK OFFSET	40	40	40

REPEATER	S	M	L	XL
REACH	425	455	480	510
STACK	631	631	640	649
EFFECTIVE TT LENGTH	554	590	623	659
SEAT TUBE LENGTH	375	400	440	470
EFFECTIVE ST ANGLE	78,4	77,9	77,4	77,1
REFERENCE SEAT HEIGHT	600	660	720	780
ACTUAL ST ANGLE	71	71	71	71
ST OFFSET AT BB HEIGHT	87	87	87	87
HEAD TUBE LENGTH	110	110	120	130
HEAD TUBE ANGLE	64,0	64,0	64,0	64,0
CHAINSTAY LENGTH	455	455	455	455
WHEELBASE	1221	1251	1280	1315
BOTTOM BRACKET DROP	30	30	30	30
ESTIMATED BB HEIGHT	345	345	345	345
STAND OVER HEIGHT	705	715	720	725
FORK OFFSET	44	44	44	44

# ACCESSORI E SPARE PARTS



**FORCELLINO UNIVERSALE TR**  
COMPATIBILE CON I MODELLI  
DAL 2015 AD OGGI  
(NON COMPATIBILE CON TR500,  
TRIPLE, RAPTURE, PBJ AND BLT,  
PATROL 2021, SPIRE )



**FORCELLINO SRAM UDH**  
COMPATIBILE CON  
PATROL 2021 E SPIRE



**BUSSOLA ASSE SYNTACE**  
COMPATIBILE CON I MODELLI  
DAL 2015 AD OGGI  
(NON COMPATIBILE CON TR500,  
TRIPLE, RAPTURE, PBJ AND BLT,  
PATROL 2021, SPIRE )



**ENDURO MAX BEARING KIT**  
KIT CUSCINETTI TELAIO  
(CONTATTACI PER SPECIFICHE E DISPONIBILITÀ )

TRANSITION BIKES

## TI SERVONO RICAMBI?

VAI SU [WWW.TRANSITIONBIKES.COM](http://WWW.TRANSITIONBIKES.COM) E CLICCA SU "SUPPORT". TROVERAI GLI SCHEMI TECNICI DI TUTTI I MODELLI TRANSITION BIKES

### PRODUCT SUPPORT

Please select your product below to get detailed specs, exploded views, manuals, web archives and purchase spare parts.

SPUR	SENTINEL CARBON	SENTINEL ALLOY	SMUGGLER CARBON
TR11	RIPCORD	SUPPRESSOR	PATROL CARBON
PATROL ALLOY	SCOUT CARBON	SCOUT ALLOY	SMUGGLER ALLOY
PBJ	THROTTLE	VANQUISH	TR500
TRANSAM	BLT	TRIPLE	TR450
TR250	COVERT	BANDIT	DOUBLE
RAPTURE	BLINDSIDE	GRAN MAL	BOTTLEROCKET
DIRTBAG	PRESTON	KLUNKER	

[WWW.TRANSITIONBIKES.COM](http://WWW.TRANSITIONBIKES.COM)  
[WWW.TRANSITIONBIKES.IT](http://WWW.TRANSITIONBIKES.IT)



RIDERS OWNED FOR LIFE

# TRANSITION

BICYCLE COMPANY

## TRANSITION - Codici MY2021

PATROL Alloy GX - TRP	5.999 €
PATROL Alloy NX	4.699 €

SENTINEL Carbon XO1	7.999 €
SENTINEL Carbon XT	7.399 €
SENTINEL Carbon GX	6.999 €

SPIRE Alloy XT	6.499 €
SPIRE Alloy GX	5.499 €
SPIRE Alloy GX - TRP	5.499 €
SPIRE Alloy Deore	4.699 €
SPIRE Alloy NX	4.699 €

SPIRE Carbon XT	7.799 €
SPIRE Carbon GX	6.999 €
SPIRE Carbon GX - TRP	6.999 €

SPUR XO1	7.399 €
SPUR GX	6.399 €
SPUR Deore	5.199 €

## TRANSITION - Codici MY2022

<b>Spire Carbon Frameset</b>	3.699 €
Spire Carbon GX - FOX	7.499 €
Spire Alloy GX - FOX	5.999 €
Spire Alloy NX	4.699 €

<b>Sentinel Carbon Frameset</b>	3.699 €
Sentinel Carbon AXS	9.999 €
Sentinel Carbon GX	7.499 €

<b>Sentinel Alloy Frameset</b>	2.199 €
Sentinel Alloy GX	5.999 €
Sentinel Alloy NX	4.699 €

<b>Spur Carbon Frameset</b>	3.599 €
Spur Carbon AXS	10.999 €
Spur Carbon GX	7.299 €
Spur Carbon NX	5.499 €

<b>Scout Alloy Frameset</b>	2.199 €
Scout Alloy GX	5.999 €
Scout Alloy NX	4.699 €

Repeater Carbon AXS	11.699 €
Repeater Carbon GX	10.299 €
Repeater Carbon NX	8.999 €

<b>PBJ Acciaio Frameset</b>	599 €
PBJ Acciaio	2.199 €

*I prezzi di questo listino si intendono IVA inclusa.*

*I prezzi indicati potrebbero subire variazioni, senza obbligo di preavviso da parte nostra, in caso di sensibili variazioni dei costi dai Paesi di origine della merce e/o del rapporto di cambio delle valute di riferimento.*